

## **SM-49**

Biological safety cabinet class II type A2




**Your  
safety  
is our  
commitment**

# A state-of-the-art BSC Class II


## High performance

- Internal design, air flow aerodynamics and monitoring, and built-in safety devices guarantee the highest performances at the most stringent safety levels, as specified by NSF49.
- Optimal flow during use thanks to **V-shape anti-obstruction front grill** with no need to use armrests.
- Working area is classified as ISO 14644-1 (Class 3) and US FED STD 209E (Class I)

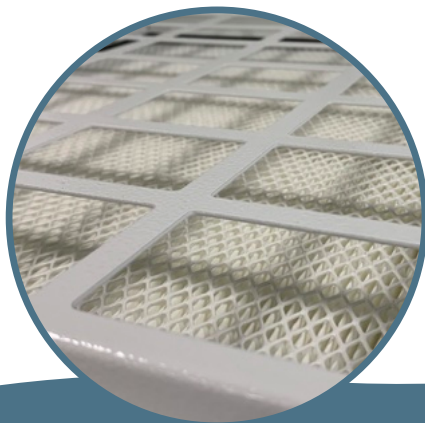

## Maximum cleanability


- Easy to clean with full **stainless-steel** working area

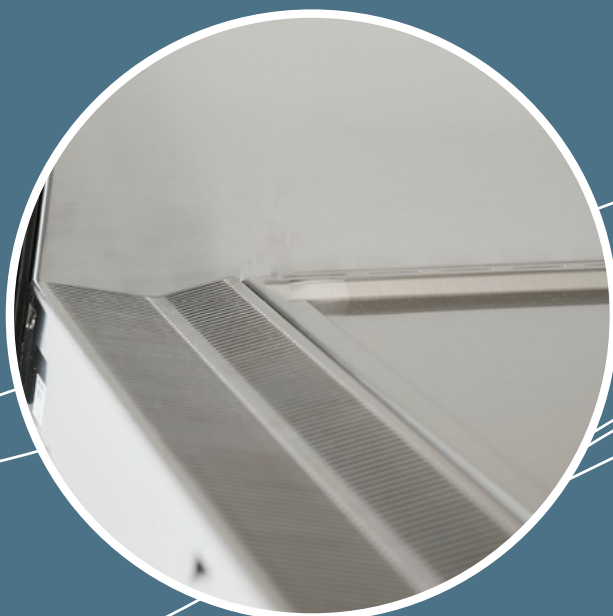

# Certified NSF ANSI/49\* and UL/CSA listed

International Standard / American National Standard for Biosafety Cabinets

\* available only for 10" front aperture model

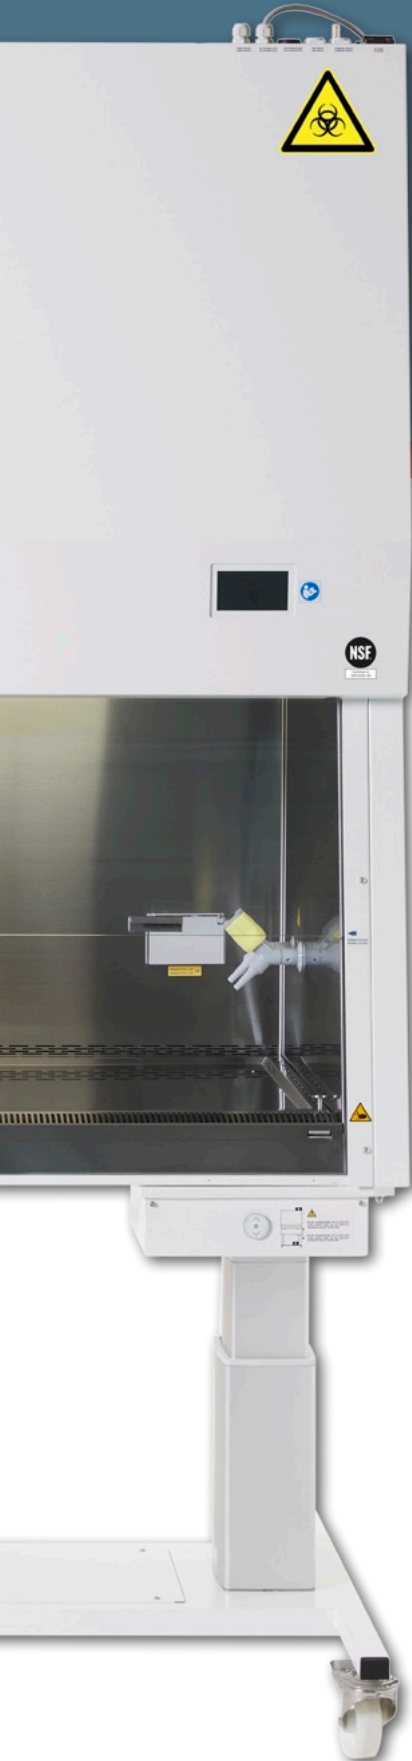

## Efficiency and Ergonomic design

- **Frameless** sliding tempered glass window with counterweighted sash system and anti-racking mechanism
- **Window sash access opening** available in three front aperture heights (8", 10", 12") to assure optimum working conditions with high levels of protection
- **Energy saving design** with high-efficiency ECM motor/blower and dimmable LED lights
- **Smart Standby mode** automatically reduces operational airflow speed, energy consumption and noise while maintaining work zone containment and sterility in non-working phase
- **Touch screen user interface** in high resolution for real-time monitoring of airflow system performance
- **Ergonomic design** with sloped front and back walls

**European design and quality  
with USA/Canada-based support**

# PRODUCT SPECIFICATIONS (4ft model)

Exterior dimensions (in)			Interior dimensions (in)	Weight (lb)
Height	with base electric stand	81.5 - 93	28	518
	with adjustable stand	85.9 - 99		
	with stand with castors	89.3		
Width		54	47.1	
Depth		31.5	26.5 (w/grid)	
Working height of front window (in)		Choice of 8 or 10 or 12		
Electrical data		115 VAC / 60 Hz		
Down Flow HEPA Filter Exhaust HEPA Filter		HEPA type K as per IEST-RP-CC001 ≥ 99.995% @ 0.2-0.3µm		
Touchscreen 4.3" color TFT LCD display		✓		
LED lighting with UV-C device (optional)		✓		
Two Duplex Outlet Back-wall GFI		✓		
Service Valves for Gas, Air, Vacuum (optional)		✓		
Exhaust Transitions - Thimble (optional)		✓		
Type 304 stainless steel interior sides, back and work surface		✓		

**FIND OUT MORE**



TECNIPLAST USA  
1345 Enterprise Dr  
West Chester, PA 19380  
tel 1-877 - 669 - 2243

www.tecnilabo.com · info@tecniplastusa.com